



Agilent 8648A/B/C/D Signal Generators


Data Sheet

Discontinuance Notice

On 1 March 2007, the 8648x Series signal generators will be discontinued. Agilent will continue to support these products until 1 March 2012. The recommended replacement is the Agilent MXG analog signal generator.

The Agilent MXG analog offers frequency ranges up to 6 Hz, fast frequency and amplitude switching, analog and pulse modulation, high reliability, and simplified design for easy self-maintenance - all in two rackunits (2RU).

For more information visit
www.agilent.com/find/mxg.

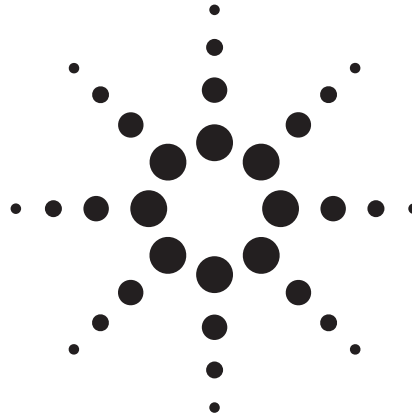

8648A, 100 kHz to 1 GHz

8648B, 9 kHz to 2 GHz

8648C, 9 kHz to 3.2 GHz

8648D, 9 kHz to 4 GHz



Specifications describe warranted instrument performance over the 0°C to 50°C temperature range and after a 30-minute warm-up, unless otherwise noted. All performance below a carrier frequency of 250 kHz is typical. Supplemental characteristics are intended to provide information useful in estimating instrument capability in your application by describing typical, but non-warranted performance.



Agilent Technologies

Frequency

Range

8648A: 100 kHz to 1000 MHz

8648B: 9 kHz to 2000 MHz

8648C: 9 kHz to 3200 MHz

8648D: 9 kHz to 4000 MHz

Resolution

Settable

8648A/B/C/D: 0.001 Hz

Display

10 Hz

Accuracy¹

Typically $\pm 3 \times 10^{-6}$ x carrier frequency (Hz),

$\pm 0.15 \times 10^{-6}$ x carrier frequency (Hz) for Option 1E5

Switching speed (typical)

8648A/B/C/D

<1001 MHz: <75 ms

≥ 1001 MHz: <100 ms

Internal reference oscillator

Accuracy and stability¹

(typical, calibration adjustment dependent)

\pm Aging rate \pm temperature effects \pm line voltage effects

| | Standard timebase (typical) | High stability timebase (Opt 1E5) |
|---------------------------|-----------------------------------|--|
| Aging | < ± 2 ppm/year | < ± 0.1 ppm/year ² < ± 0.0005 ppm/day ² |
| Temperature | < ± 1 ppm | < ± 0.01 ppm ³ (typical) |
| Line Voltage ⁴ | < ± 0.5 ppm | < ± 0.1 ppm (typical) |

Output

10 MHz, typically $>0.5 V_{\text{rms}}$ level into 50 Ω

External reference oscillator input

Accepts 2, 5, 10 MHz ± 10 ppm typical (± 1 ppm typical with option 1E5) and a level range of $0.5 V_{\text{rms}}$ to $2 V_{\text{rms}}$ into 50 Ω

Spectral purity

Harmonics

<-30 dBc (output $\leq +4$ dBm)

Subharmonics (output $\leq +4$ dBm)

<1001 MHz: <-60 dBc

≤ 3200 MHz: <-50 dBc

≥ 4000 MHz: <-40 dBc

Nonharmonics (≥ 5 kHz offset, output $\leq +4$ dBm)

8648A/B/C/D

<249 MHz: <-55 dBc

<1001 MHz: <-60 dBc

<2001 MHz: <-54 dBc

≤ 4000 MHz: <-48 dBc

Residual FM (CCITT, rms)

8648A/B/C/D

<249 MHz: <7 Hz, typically <4 Hz

<501 MHz: <4 Hz, typically <2 Hz

<1001 MHz: <7 Hz, typically <4 Hz

<2001 MHz: <14 Hz, typically <8 Hz

≤ 4000 MHz: <28 Hz, typically <12 Hz

SSB phase noise (at 20 kHz offset, typical)

8648A/B/C/D

at fc 500 MHz: <-120 dBc/Hz


at fc 1000 MHz: <-116 dBc/Hz

at fc 2000 MHz: <-110 dBc/Hz

at fc 3000 MHz: <-106 dBc/Hz

at fc 4000 MHz: <-104 dBc/Hz

Typical phase noise of the 8648A/B/C/D at 500 MHz

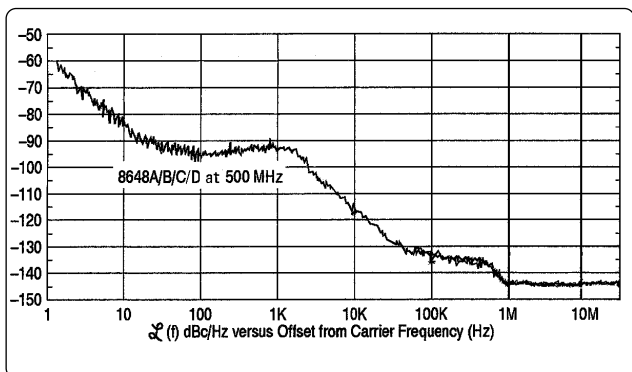

1. After one hour warm-up and within one year of calibration.

2. After four days warm-up and within one year of calibration.

3. Applies over the $25^\circ\text{C} \pm 5^\circ\text{C}$ range.

4. Applies for line voltage change of $\pm 5\%$.

Output

Range

8648A

+10 to -136 dBm

8648B/C/D

≤2500 MHz: +13 to -136 dBm

≤4000 MHz: +10 to -136 dBm

Maximum leveled power

(High power option 1EA)

8648B/C/D only¹

≤100 kHz: +17 dBm

≤1000 MHz: +20 dBm


≤1500 MHz: +19 dBm

≤2100 MHz: +17 dBm

≤2500 MHz: +15 dBm

≤4000 MHz: +13 dBm

Option 1EA—Typical power versus frequency (GHz)

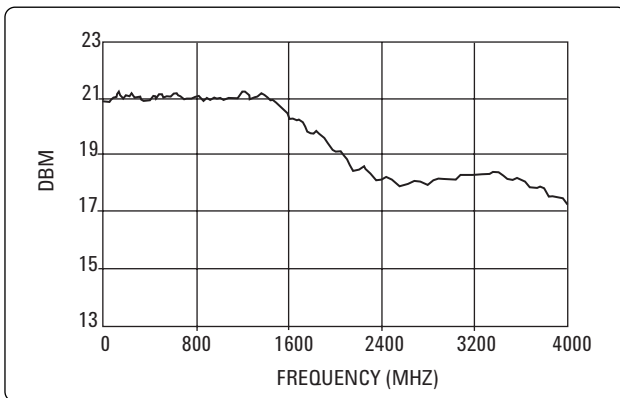

Display resolution

0.1 dB

Accuracy

8648A/B/C/D^{2,3,4}

≤2500 MHz: ±1.0 dB

≤3200 MHz: ±1.5 dB

≤4000 MHz: ±2.0 dB

Reverse power protection (watts into 50 Ω)

≤2000 MHz: 50 watts

≤4000 MHz: 25 watts

SWR (output <-6 dBm, typical)

8648A/B/C/D

<249 kHz: <2.5:1

<2500 MHz: <1.5:1

≤4000 MHz: <2.0:1

Output impedance

Nominally 50 ohms

Amplitude modulation ($f_c > 1.5$ MHz)⁵

Range

0 to 100% (output ≤+4 dBm)

Resolution

0.1%

Accuracy⁶ (1 kHz rate)

±5% of setting ±1.5%

Rates

8648A/B/C/D

Internal: 400 Hz or 1 kHz or 10 Hz to 20 kHz with Opt 1E2

External: DC: dc to 25 kHz (typical, 3 dB BW)

AC: 1 Hz to 25 kHz (typical, 3 dB BW)

Distortion (1 kHz rate, THD+N, 0.3 to 3 kHz BW)

(at 30 % AM): <2%

8648A (at 90% AM): <3%

8648B/C/D (at 70% AM): <3%

1. Combining option 1E6 with 1EA reduces maximum output power by 2 dB above 100 MHz. Below 100 MHz, maximum output is +13 dBm (typically +16 dBm for carrier frequencies between 100 kHz and 100 MHz).
2. Accuracy is valid from maximum specified output power to -127 dBm. Below -127 dBm, accuracy is typically ±3 dB in the range 100 kHz to 2500 MHz, and is not specified outside this frequency range.
3. Accuracy applies at 25°C ±5°C; and typically degrades up to ±0.5 dB over 0°C to 50°C or at output power levels >13 dBm.
4. Accuracy is ±3 dB for power levels between -100 dBm and -127 dBm for frequencies below 100 kHz or above 2500 MHz.
5. AM is typical above 1001 MHz.
6. AM accuracy applies at 25°C ±5°C and at <70% depth: it is typically ±7% of setting ±1.5% over 0°C to 50°C.

Frequency modulation

Peak deviation (rates >25 Hz ac FM)

8648A/B/C/D

<249 MHz: 0 to 200 kHz
<501 MHz: 0 to 100 kHz
<1001 MHz: 0 to 200 kHz
<2001 MHz: 0 to 400 kHz
≤4000 MHz: 0 to 800 kHz

Resolution

For ≤10% peak deviation

<2001 MHz: 10 Hz
≥2001 MHz: 20 Hz

For >10% to maximum peak deviation

<2001 MHz: 100 Hz
≥2001 MHz: 200 Hz

Deviation accuracy (internal 1 kHz rate)

8648A/B/C/D

<1001 MHz: ±3% of FM deviation ±30 Hz
<2001 MHz: ±3% of FM deviation ±60 Hz
≤4000 MHz: ±3% of FM deviation ±120 Hz

Rates

8648A/B/C/D

Internal: 400 Hz or 1 kHz or 10 Hz to 20 kHz with Opt 1E2
External: DC: dc to 150 kHz (typical, 3 dB BW)
AC: 1 Hz to 150 kHz (typical, 3 dB BW)

Distortion (1 kHz rate, THD + N, 0.3 to 3 kHz BW)

<1001 MHz: <1% at deviations >4 kHz
<2001 MHz: <1% at deviations >8 kHz
≤4000 MHz: <1% at deviations >16 kHz
(88 to 108 MHz: <0.5% at deviations ≥75 kHz¹)

Carrier frequency accuracy (relative to CW in dcFM)²

8648 A/B/C/D

<1001 MHz: ±100 (typical 40) Hz, deviations <10 kHz
<2001 MHz: ±200 (typical 80) Hz, deviations <20 kHz
≤4000 MHz: ±400 (typical 160) Hz, deviations <40 kHz

FM + FM

Internal 1 kHz or 400 Hz source plus external. In internal plus external FM mode, the internal source produces the set level of deviation. The external input should be set to ≤±0.5V peak or 0.5 Vdc (one-half the set deviation).

Phase modulation

Peak deviation

<249 MHz: 0 to 10 radians
<501 MHz: 0 to 5 radians
<1001 MHz: 0 to 10 radians
<2001 MHz: 0 to 20 radians
≤4000 MHz: 0 to 40 radians

Resolution

<2001 MHz: 0.01 radians
≥2001 MHz: 0.02 radians

Deviation accuracy (internal 1 kHz rate, typical)

8648A/B/C/D

<1001 MHz: ±3% of deviation ±0.05 radians
<2001 MHz: ±3% of deviation ±0.1 radians
≤4000 MHz: ±3% of deviation ±0.2 radians

Rates:

Internal

400 Hz or 1 kHz or 10 Hz to 20 kHz with Opt 1E2¹

External

20 Hz to 10 kHz (typical, 3 dB BW)

Distortion (1 kHz rate)

8648 A/B/C/D

<1001 MHz: <1% at deviations ≥3 radians
<2001 MHz: <1% at deviations ≥6 radians
≤4000 MHz: <1% at deviations ≥12 radians

Modulation source

Internal

400 Hz or 1 kHz, front panel BNC connector provided at nominally 1 Vpk into 600 Ω.

External

1 Vpk into 600 Ω (nominal) required for full scale modulation. (High/Low indicator provided for external signals ≤10 kHz.)

1. Only on 8648 series.

2. Specifications apply over the 25°C ±5°C range within one hour of dc FM calibration.

Modulation generator (Option 1E2)¹

Adds variable frequency modulation source. Functions also included in Option 1EP Pager encoder/signalling option.

Waveforms

Sine, Square, Triangle, Sawtooth (Ramp)

Frequency range

Sine: 10 Hz to 20 kHz

Square, Triangle, Sawtooth: 100 Hz to 2 kHz²

Frequency accuracy

±0.01% typical

Frequency resolution

1 Hz (3 digits or 10 Hz displayed)

Depth and deviation accuracy (1 kHz sine)

Refer to AM, FM, and Phase Modulation Accuracy specs

Output

Front panel BNC. Nominally 1 Vpk

Pulse modulation (Option 1E6)

(8648B/C/D Only)

Adds high performance pulse modulation capability

On/off ratio

<2000 MHz: >80 dB

≤4000 MHz: >70 dB

Rise/fall times

<10 ns

Maximum repetition rate

10 MHz

Video feedthrough

<30 mV (typical)

Delay

<60 ns (typical)

Pulse input

TTL level (±15 V max)

Pager encoder/signaling (Option 1EP)

(8648A only)


Adds functionality for testing POCSAG, FLEX^{TM3} and FLEX-TD. Also includes Modulation Generator functions of Option 1E2. Instrument characteristics are the same as the 8648A except as noted below.

Frequency

Accuracy with Option 1E5⁴ : Typically $\pm 0.15 \times 10^{-6} \times$ carrier frequency in Hz or $0.092 \times 10^{-6} \times$ carrier frequency in Hz within 90 days of calibration.

Frequency modulation

FSK Deviation Accuracy with Option 1EP: ±60 Hz⁵

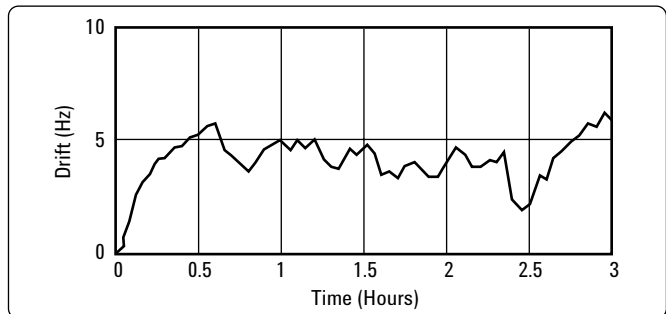

Pager signaling

Supported Pager Protocols: POCSAG, FLEXTM, and FLEX-TD

POCSAG

Speed: 512, 1200, and 2400 bps

Message Format: Tone only, Numeric, Alphanumeric

FLEX/FLEX-TD

Speed

2 Level FSK: 1600 and 3200 bps

4 Level FSK: 3200 and 6400 bps

Message Format: Tone only, Numeric (standard and special), Alphanumeric, HEX/Binary

Address Type: Short, Long

Messaging accessible from front panel or GP-IB

Message Types: Five fixed (built-in), one user-defined

Message Length: 40 characters maximum

Repetition Modes: Single, Burst, Continuous

Messaging accessible only over GP-IB

Message Type: Arbitrary (user-defined)

Batch Length

FLEX/FLEX-TD: 128 Frames

POCSAG: 128 Batches

Repetition Mode: Single only

Data Rate Accuracy: ±5 ppm⁶

1. Only on 8648 series.
2. Useable from 10 Hz to 20 kHz; however, bandwidth limitations may result in wave-form degradation. Refer to AM, FM, and Phase ModulationRate specs (External AC mode).
3. FLEX is a Motorola trademark.
4. After one hour warm-up and within one year of calibration.
5. Specifications apply over the 25°C ±5°C range, 4.8 kHz deviation. Meets FLEX requirements at 274 to 288, 322 to 329, 929 to 932 MHz.
6. Specifications apply over the 25°C ±5°C range.

Modulation source

Internal: 400 Hz or 1 kHz, or audio generator (see Option 1E2 for characteristics), front panel BNC connector provided at nominally 1 Vp into 600 Ω .

General

Storage Registers: 70 storage registers with sequence and register number displayed. Up to 10 sequences are available with 30 registers each.

ISO 9002 compliant

The Agilent 8648A/B/C/D signal generators are manufactured in an ISO 9002 registered facility in concurrence with Agilent Technologies' commitment to quality.

Environmental

Operating temperature range

0°C to 50°C

Shock and vibration

Meets MIL STD 28800E Type III, Class 5

Leakage

Conducted and radiated interference meets MIL STD 461B RE02 Part 2 and CISPR 11. Leakage is typically <1 μ V (nominally 0.1 μ V with a two-turn loop) at \leq 1001 MHz, when measured with a resonant dipole antenna one inch from any surface (except the rear panel) with output level <0 dBm (all inputs/outputs properly terminated).

Remote programming

Interface

GP-IB (IEEE-488.2-1987) with Listen and Talk.

Control languages

SCPI version 1992.0. 8656B and 8657 code compatibility on 8648A/B/C/D.

Functions controlled

All functions are programmable except the front-panel power key, the knobs, the increment set key, the arrow keys, the reference keys and the rear-panel display contrast control.

IEEE-488 functions

SH1, AH1, T6, TE0, L4, LE0, SR1, RL1, PP0, DC1, DT0, C0, E2.

General

Power requirements

90 to 264 V; 48 to 440 Hz; 170 VA maximum

Internal diagnostics

Automatically executes on instrument power-up. Assists user in locating instrument errors and locating faulty module.

Storage registers

300 storage registers with sequence and register number displayed. Up to 10 sequences are available with 30 registers each.

Weight

8648A

7 kg (15 lb.) net, 9 kg (20 lb.) shipping

8648B/C/D

8.5 kg (19 lb.) net, 11 kg (24 lb.) shipping

Dimensions


8648A/B/C/D

165H x 330W x 368D mm (6.5H x 13W x 14.6D inches)

Accessories

Transit case

8648A/B/C/D: P/N 5961-4720

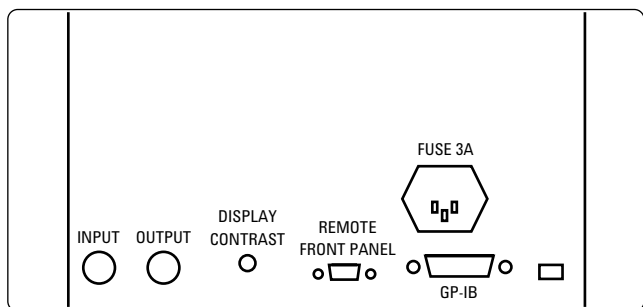

8648 Rear panel

To add options to a model, use the following ordering scheme:

Example

| | |
|-----------------|-----------|
| Model # | 8648C |
| Model #-option# | 8648C-1EA |
| Model #-option# | 8348C-1E2 |

Options

| | |
|--------------|---|
| Model # -1EA | High output power ¹ |
| Model # -1E2 | Modulation generator |
| Model # -1E5 | High stability time base |
| Model # -1E6 | Pulse modulation ¹ |
| Model # -1EP | Pager signaling capability ² |

Documentation

| | |
|--------------|--|
| Model # -UK6 | Commercial calibration certificate with testdata |
| 08648-90048 | English Operation and Service Guide |
| Model # -AB0 | Chinese localization Taiwan |
| Model # -AB1 | Korean localization |
| Model # -AB2 | Chinese localization - China |
| Model # -ABD | German localization |
| Model # -ABE | Spanish localization |
| Model # -ABF | French localization |
| Model # -ABJ | Japanese localization |
| Model # -0B0 | Delete manuals |

Accessories

| | |
|--------------|----------------|
| Model # -1CM | Rack mount kit |
|--------------|----------------|

Warranty and Service

Standard warranty is 12 months.

For warranty and service of 5 years, specify 60 months
(quantity = 60)

| | |
|-------|--|
| R-51B | Return-to-Agilent warranty and service plan (months) |
|-------|--|

Calibration

For 3 years, specify 36 months of the appropriate calibration plan.

For 5 years, specify 60 months.

| | |
|-----------|---|
| R-50C-001 | Standard calibration plan (months) |
| R-50C-002 | Standards compliant calibration plan (months) |

1. Not available on 8648A

2. Only available on 8648A

Additional resources

For additional information and feature comparisons, refer to the 8648 product overview (literature number 5962-6191E).



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



Agilent Direct

www.agilent.com/find/quick

Quickly choose and use your test equipment solutions with confidence.



www.agilent.com/find/open

Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.

LXI is the US registered trademark of the LXI Consortium.

Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to www.agilent.com/find/removealldoubt

www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Phone or Fax

United States:

(tel) 800 829 4444
(fax) 800 829 4433

Canada:

(tel) 877 894 4414
(fax) 800 746 4866

China:

(tel) 800 810 0189
(fax) 800 820 2816

Europe:

(tel) 31 20 547 2111

Japan:

(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:

(tel) (080) 769 0800
(fax) (080) 769 0900

Latin America:

(tel) (305) 269 7500

Taiwan:

(tel) 0800 047 866
(fax) 0800 286 331

Other Asia Pacific Countries:

(tel) (65) 6375 8100
(fax) (65) 6755 0042
Email: tm_ap@agilent.com

Revised: 09/14/06

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2002, 2005, 2006
Printed in USA, November 6, 2006
5965-3432E



Agilent Technologies